



BICS2 instruction card

concerning: Coding of coding of the tank location for inland navigation

These instructions explain the coding of the tank locations used in tanker shipping, in particular for clearly indicating the tank position on board the ship in the electronic voyage report to the inland navigation authorities.

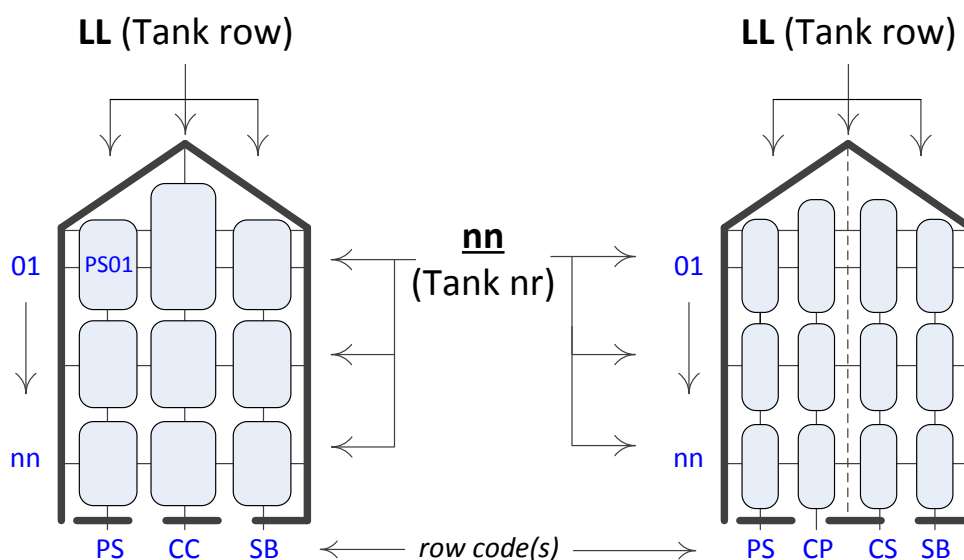


Image 1: Tank location coding (position of the tank for inland navigation tanker ships)

The tank location is coded as LLnn, where:

- “LL” indicates the location on the ship (the row)

In the case of a ship with two or three rows:

- - PS (port side).
- - SB (starboard side).
- - CC (centre centre).

In the case of a ship with four rows, the middle rows are indicated as follows:

- - CP (centre port side).
- - CS (centre starboard side)

In the case of a ship with one row, the row is indicated as follows: CC.

- nn gives the tank’s number, starting with 01 from the front.

Example: a tank in the first position on the port side (starting from the bow) is indicated by PS01.